

**Skorled**<sup>®</sup>



IN  
FO  
RD  
POL  
TENNIS  
WATER  
POL  
BALL  
ICE  
BASEBALL  
RUGBY  
SPORTS  
ATHLETICS  
BEST  
QUALITY  
POLO  
CUSHION  
HOCKEY  
VOLLEYBALL  
SPORT  
NETBALL  
RUGBY  
ATHLETIC  
LLBOARD  
BEST  
FOOTBALL  
KETBALL  
WATER  
QUALITY  
STICE  
CUSHION  
SWIMMING

the best  
score is  
quality

[www.skorled.com](http://www.skorled.com)

**Skorled**

the best  
score is  
quality

# MULTISPORT MULTISPORT

BASKETBALL - VOLLEYBALL - HANDBALL - FUTSAL

XXXX

# 001



# 01

## MULTISPORT SYSTEM

### GENERAL FEATURES

- It has three language supports: Turkish, English and French. There is support for a total of 157 characters. In addition to the characters of the three languages, it also includes German, Azerbaijani, Turkmen and Uzbek characters.
- It can work wired or wireless.
- The controller can be used wirelessly for up to 8 hours with a 1-hour charge.
- Systems are so easy for the user.
- Team information and player information of the team can be recorded.
- Statistics of the game are recorded.
- The operation of the scoreboard can be tested.
- It is compatible with FIBA whistle system.

### FIBA LEVEL 1 TYPE VIDEOBOARD SKL-LVE-BX



### TECHNICAL PARAMETERS

Operating Voltage	100 – 120V / 200V – 240V
Operating Temperature	(-40°C) – (+55°C)
Protection Class	IP54
Type Of Material	Al
Guarantee Duration	2 Years
Frame Color	Mat Black



S 24-4Y



SKL-TFM-V1



SYG



SKL-CB-V1



SKL-BVH-V2



S24K



SKL-BGS-V1

# FIBA LEVEL 1 TYPE SCOREBOARD SBS - 7500X



# FIBA LEVEL 1 TYPE SCOREBOARD SBS - 7500X



**SBS - 7500S**  
(12 players)



**SBS - 7500R**  
(16 players and suspension time)



**SBS - 7500N**  
(NBA type with players info)



**SBS - 7500H**  
(12 players and suspension time)



## TECHNICAL PARAMETERS

	SBS 7500S	SBS 7500R	SBS 7500N	7500H
Height	3150 mm	4050 mm	3150 mm	3150 mm
Width	6480 mm	6480 mm	6480 mm	6480 mm
Thickness	85 mm	85 mm	85 mm	85 mm
Weight	305 kg	390 kg	305 kg	325 kg
Average Power Consumption	5350 W	6940 W	5430 W	5595 W
Maximum Power Consumption	8910 W	11560 W	9045 W	9325 W
Operating Voltage	100-120V / 200 - 240V	100-120V / 200 - 240V	100-120V / 200 - 240V	100-120V / 200 - 240V
Operating Temperature	(-40C) - (+55C)	(-40C) - (+55C)	(-40C) - (+55C)	(-40C) - (+55C)
Protection Class	IP54	IP54	IP54	IP54
Type Of Material	Al	Al	Al	Al
Guarantee Duration	2 Years	2 Years	2 Years	2 Years
Frame Color	Mat Black	Mat Black	Mat Black	Mat Black

## DISPLAY CHARACTERISTICS

	SBS 7500S	SBS 7500R	SBS 7500N	7500H
Game clock	40 cm, yellow and 4 digits	40 cm, yellow and 4 digits	40 cm, yellow and 4 digits	40 cm, yellow and 4 digits
Period	30 cm, white and 1 digit	30 cm, white and 1 digit	30 cm, white and 1 digit	30 cm, white and 1 digit
Team scores	40 cm, white and 3 digits per team	40 cm, white and 3 digits per team	40 cm, white and 3 digits per team	40 cm, white and 3 digits per team
Team fouls	35 cm, red and 1 digit per team	35 cm, red and 1 digit per team	35 cm, red and 2 digits per team	35 cm, red and 1 digit per team
Bonus indicator	-	-	2 yellow dots	-
Time-out indicator	3 yellow dots	3 yellow dots	20 cm, 1 yellow digit	3 yellow dots
Direction indicator	2 red arrows	2 red arrows	2 red arrows	2 red arrows
Player's number and suspension time count (or display the last player foul)	-	20 cm, 2 yellow digits and 3 red digits per team	-	16 cm, 2 yellow digits and 3 red digits per team
Time-out timer	30 cm, 2 yellow digits	30 cm, 2 yellow digits	30 cm, 2 yellow digits	30 cm, 2 yellow digits
Player information (Player's number, made foul number and score)	15 cm, 2 yellow digits, 1 red digit and 2 white digits per player	15 cm, 2 yellow digits, 1 red digit and 2 white digits per player	15 cm, 2 yellow digits, 1 red digit and 2 white digits per player	15 cm, 2 yellow digits, 1 red digit and 2 white digits per player
Team name	32 cm, white and max. 12 characters per team	32 cm, white and max. 12 characters per team	32 cm, white and max. 12 characters per team	32 cm, white and max. 12 characters per team
Player name	16 cm, yellow and max. 16 characters per player	16 cm, yellow and max. 16 characters per player	16 cm, yellow and max. 16 characters per player	16 cm, yellow and max. 16 characters per player



S 24-4Y



SKL-TFM-V1



SYG



SKL-CB-V1



SKL-BVH-V2



S24K



SKL-BGS-V1

The SBS 7500 has also SBS 7500E and SBS 7500Q special models. In these models, player information (player's number, made foul number and score) are 16 cm. The player number and suspension time are 25 cm.

# FIBA LEVEL 2 TYPE SCOREBOARD SBS - 5500X




# FIBA LEVEL 2 TYPE SCOREBOARD SBS - 5500X



**SBS - 5500S**  
(12 players)



**SBS - 5500R**  
(16 players and  
suspension time)

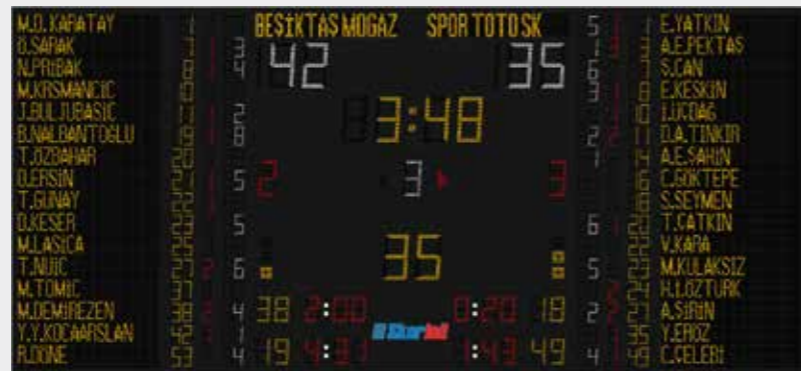

**SBS - 5500N**  
(NBA type with  
players info)



**SBS - 5500H**  
(12 players and  
suspension time)



## TECHNICAL PARAMETERS

	SBS 5500S	SBS 5500R	SBS 5500N	SBS 5500H
Height	1900 mm	2500 mm	1900 mm	1900 mm
Width	5480 mm	5480 mm	5480 mm	5480 mm
Thickness	85 mm	85 mm	85 mm	85 mm
Weight	150 kg	180 kg	150 kg	160 kg
Average Power Consumption	3175 W	4205 W	3215 W	3290 W
Maximum Power Consumption	5285 W	7005 W	5355 W	5480 W
Operating Voltage	100-120V / 200 - 240V	100-120V / 200 - 240V	100-120V / 200 - 240V	100-120V / 200 - 240V
Operating Temperature	(-40C) - (+55C)	(-40C) - (+55C)	(-40C) - (+55C)	(-40C) - (+55C)
Protection Class	IP54	IP54	IP54	IP54
Type Of Material	Al	Al	Al	Al
Guarantee Duration	2 Years	2 Years	2 Years	2 Years
Frame Color	Mat Black	Mat Black	Mat Black	Mat Black

## DISPLAY CHARACTERISTICS

	SBS 5500S	SBS 5500R	SBS 5500N	5500H
Game clock	30 cm, yellow and 4 digits	30 cm, yellow and 4 digits	30 cm, yellow and 4 digits	30 cm, yellow and 4 digits
Period	23 cm, white and 1 digit	23 cm, white and 1 digit	23 cm, white and 1 digit	23 cm, white and 1 digit
Team scores	30 cm, white and 3 digits per team	30 cm, white and 3 digits per team	30 cm, white and 3 digits per team	30 cm, white and 3 digits per team
Team fouls	23 cm, red and 1 digit per team	23 cm, red and 1 digit per team	23 cm, red and 2 digits per team	23 cm, red and 1 digit per team
Bonus indicator	-	-	2 yellow dots	-
Time-out indicator	3 yellow dots	3 yellow dots	20 cm, 1 yellow digit	3 yellow dots
Direction indicator	2 red arrows	2 red arrows	2 red arrows	2 red arrows
Player's number and suspension time count (or display the last player foul)	-	16 cm, 2 yellow digits and 3 red digits per team	-	16 cm, 2 yellow digits and 3 red digits per team
Time-out timer	30 cm, 2 yellow digits	30 cm, 2 yellow digits	30 cm, 2 yellow digits	20 cm, 2 yellow digits
Player information (Player's number, made foul number and score)	12 cm, 2 yellow digits, 1 red digit and 2 white digits per player	12 cm, 2 yellow digits, 1 red digit and 2 white digits per player	12 cm, 2 yellow digits, 1 red digit and 2 white digits per player	12 cm, 2 yellow digits, 1 red digit and 2 white digits per player
Team name	16 cm, yellow and max. 12 characters per team	16 cm, yellow and max. 12 characters per team	16 cm, yellow and max. 12 characters per team	16 cm, yellow and max. 12 characters per team
Player name	12 cm, yellow and max. 12 characters per player	12 cm, yellow and max. 12 characters per player	12 cm, yellow and max. 12 characters per player	12 cm, yellow and max. 12 characters per player



S24-14



SKL-TFM-V1



SYG



SKL-CB-V1



SKL-BVH-V2



S24K



SKL-BGS-V1

# FIBA LEVEL 2 TYPE SCOREBOARD SBS - 3000TX



# FIBA LEVEL 2 TYPE SCOREBOARD SBS - 3000TX



**SBS 3000TS**  
(12 players)



**SBS 3000TR**  
(16 players and suspension time)



**SBS 3000T3**  
(3x3)



**SBS 3000TN**  
(NBA type with players info)



S24-14



SKL-BVH-V2



S24K



SKL-BGS-V1

**SBS 3000TA**  
(Basic type)



**SBS 3000TH**  
(Basic type with suspension time)



**SBS 3000TB**  
(Basic NBA type)



## TECHNICAL PARAMETERS

	SBS 3000TA	SBS 3000T3	SBS 3000TB	SBS 3000TH
Height	1900 mm	1350 mm	1900 mm	1900 mm
Width	2200 mm	2200 mm	2200 mm	2200 mm
Thickness	85 mm	85 mm	85 mm	85 mm
Weight	55 kg	45 kg	55 kg	60 kg
Average Power Consumption	480 W	400 W	520 W	595 W
Maximum Power Consumption	795 W	665 W	865 W	990 W
Operating Voltage	100-120V / 200 - 240V	100-120V / 200 - 240V	100-120V / 200 - 240V	100-120V / 200 - 240V
Operating Temperature	(-40C) - (+55C)	(-40C) - (+55C)	(-40C) - (+55C)	(-40C) - (+55C)
Protection Class	IP54	IP54	IP54	IP54
Type Of Material	Al	Al	Al	Al
Guarantee Duration	2 Years	2 Years	2 Years	2 Years
Frame Color	Mat Black	Mat Black	Mat Black	Mat Black
	SBS 3000TS	SBS 3000TR	SBS 3000TN	
Height	1900 mm	2500 mm	1900 mm	
Width	3340 mm	3340 mm	3340 mm	
Thickness	85 mm	85 mm	85 mm	
Weight	90 kg	105 kg	90 kg	
Average Power Consumption	805 W	1045 W	845 W	
Maximum Power Consumption	1335 W	1740 W	1405 W	
Operating Voltage	100-120V / 200 - 240V	100-120V / 200 - 240V	100-120V / 200 - 240V	
Operating Temperature	(-40C) - (+55C)	(-40C) - (+55C)	(-40C) - (+55C)	
Protection Class	IP54	IP54	IP54	
Type Of Material	Al	Al	Al	
Guarantee Duration	2 Years	2 Years	2 Years	
Frame Color	Mat Black	Mat Black	Mat Black	

## DISPLAY CHARACTERISTICS

	SBS 3000TA	SBS 3000T3	SBS 3000TB	SBS 3000TH
Game clock	30 cm, yellow and 4 digits	30 cm, yellow and 4 digits	30 cm, yellow and 4 digits	30 cm, yellow and 4 digits
Period	23 cm, white and 1 digit	-	23 cm, white and 1 digit	23 cm, white and 1 digit
Team scores	30 cm, white and 3 digits per team	30 cm, white and 2 digits per team	30 cm, white and 3 digits per team	30 cm, white and 3 digits per team
Team fouls	23 cm, red and 1 digit per team	23 cm, red and 2 digits per team	23 cm, red and 2 digits per team	23 cm, red and 1 digit per team
Bonus indicator	-	2 yellow dots	2 yellow dots	-
Time-out indicator	3 yellow dots	-	30 cm, 1 yellow digit	3 yellow dots
Direction indicator	2 red arrows	-	2 red arrows	2 red arrows
Player's number and suspension time count (or display the last player foul)	-	-	-	16 cm, 2 yellow digits and 3 red digits per team
Time-out timer	30 cm, 2 yellow digits	-	30 cm, 2 yellow digits	20 cm, 2 yellow digits
Team Name	16 cm, yellow and max. 12 characters per team	16 cm, yellow and max. 12 characters per team	16 cm, yellow and max. 12 characters per team	16 cm, yellow and max. 12 characters per team
	SBS 3000TS	SBS 3000TR	SBS 3000TN	
Game clock	30 cm, yellow and 4 digits	30 cm, yellow and 4 digits	30 cm, yellow and 4 digits	
Period	23 cm, white and 1 digit	23 cm, white and 1 digit	23 cm, white and 1 digit	
Team scores	30 cm, white and 3 digits per team	30 cm, white and 3 digits per team	30 cm, white and 3 digits per team	
Team fouls	23 cm, red and 1 digit per team	23 cm, red and 1 digit per team	23 cm, red and 2 digits per team	
Bonus indicator	-	-	2 yellow dots	
Time-out indicator	3 yellow dots	3 yellow dots	20 cm, 1 yellow digit	
Direction indicator	2 red arrows	2 red arrows	2 red arrows	
Player's number and suspension time count (or display the last player foul)	-	16 cm, 2 yellow digits and 3 red digits per team	-	
Time-out timer	30 cm, 2 yellow digits	30 cm, 2 yellow digits	30 cm, 2 yellow digits	
Player information (Player's number, made foul number and score)	12 cm, 2 yellow digits, 1 red digit and 2 white digits per player	12 cm, 2 yellow digits, 1 red digit and 2 white digits per player	12 cm, 2 yellow digits, 1 red digit and 2 white digits per player	
Team name	16 cm, yellow and max. 12 characters per team	16 cm, yellow and max. 12 characters per team	16 cm, yellow and max. 12 characters per team	

# MULTISPORT SCOREBOARD SBS - 3000X



# MULTISPORT SCOREBOARD SBS - 3000X



**SBS 3000S**  
(12 players)



**SBS 3000R**  
(16 players and suspension time)



**SBS 30003**  
(3x3)



**SBS 3000N**  
(NBA type with players info)



S24-14



SKL-BVH-V2

**SBS 3000A**  
(Basic type)



**SBS 3000H**  
(Basic type with suspension time)



**SBS 3000B**  
(Basic NBA type)



S24K



SKL-BGS-V1

## TECHNICAL PARAMETERS

	SBS 3000A	SBS 3000B	SBS 30003	SBS 3000H
Height	1900 mm	1900 mm	1350 mm	1900 mm
Width	2200 mm	2200 mm	2200 mm	2200 mm
Thickness	85 mm	85 mm	85 mm	85 mm
Weight	50 kg	50 kg	40 kg	53 kg
Average Power Consumption	280 W	325 W	205 W	400 W
Maximum Power Consumption	465 W	535 W	340 W	660 W
Operating Voltage	100-120V / 200 - 240V	100-120V / 200 - 240V	100-120V / 200 - 240V	100-120V / 200 - 240V
Operating Temperature	(-40C) - (+55C)	(-40C) - (+55C)	(-40C) - (+55C)	(-40C) - (+55C)
Protection Class	IP54	IP54	IP54	IP54
Type Of Material	Al	Al	Al	Al
Guarantee Duration	2 Years	2 Years	2 Years	2 Years
Frame Color	Mat Black	Mat Black	Mat Black	Mat Black
	SBS 3000S	SBS 3000R	SBS 3000N	
Height	1900 mm	2500 mm	1900 mm	
Width	3340 mm	3340 mm	3340 mm	
Thickness	85 mm	85 mm	85 mm	
Weight	82 kg	100 kg	82 kg	
Average Power Consumption	605 W	850 W	645 W	
Maximum Power Consumption	1005 W	1410 W	1075 W	
Operating Voltage	100-120V / 200 - 240V	100-120V / 200 - 240V	100-120V / 200 - 240V	
Operating Temperature	(-40C) - (+55C)	(-40C) - (+55C)	( -40C) - (+55C)	
Protection Class	IP54	IP54	IP54	
Type Of Material	Al	Al	Al	
Guarantee Duration	2 Years	2 Years	2 Years	
Frame Color	Mat Black	Mat Black	Mat Black	

## DISPLAY CHARACTERISTICS

	SBS 3000A	SBS 30003	SBS 3000B	SBS 3000H
Game clock	30 cm, yellow and 4 digits	30 cm, yellow and 4 digits	30 cm, yellow and 4 digits	30 cm, yellow and 4 digits
Period	23 cm, white and 1 digit	-	23 cm, white and 1 digit	23 cm, white and 1 digit
Team scores	30 cm, white and 3 digits per team	30 cm, white and 2 digits per team	30 cm, white and 3 digits per team	30 cm, white and 3 digits per team
Team fouls	23 cm, red and 1 digit per team	23 cm, red and 2 digits per team	23 cm, red and 2 digits per team	23 cm, red and 1 digit per team
Bonus indicator	-	2 yellow dots	2 yellow dots	-
Time-out indicator	3 yellow dots	-	30 cm, 1 yellow digit	3 yellow dots
Direction indicator	2 red arrows	-	2 red arrows	2 red arrows
Player's number and suspension time count (or display the last player foul)	-	-	-	16 cm, 2 yellow digits and 3 red digits per team
Time-out timer	30 cm, 2 yellow digits	-	30 cm, 2 yellow digits	20 cm, 2 yellow digits
Team name	Stickers	Stickers	Stickers	Stickers
	SBS 3000S	SBS 3000R	SBS 3000N	
Game clock	30 cm, yellow and 4 digits	30 cm, yellow and 4 digits	30 cm, yellow and 4 digits	
Period	23 cm, white and 1 digit	23 cm, white and 1 digit	23 cm, white and 1 digit	
Team scores	30 cm, white and 3 digits per team	30 cm, white and 3 digits per team	30 cm, white and 3 digits per team	
Team fouls	23 cm, red and 1 digit per team	23 cm, red and 1 digit per team	23 cm, red and 2 digits per team	
Bonus indicator	-	-	2 yellow dots	
Time-out indicator	3 yellow dots	3 yellow dots	20 cm, 1 yellow digit	
Direction indicator	2 red arrows	2 red arrows	2 red arrows	
Player's number and suspension time count (or display the last player foul)	-	16 cm, 2 yellow digits and 3 red digits per team	-	
Time-out timer	30 cm, 2 yellow digits	30 cm, 2 yellow digits	30 cm, 2 yellow digits	
Player information (Player's number, made foul number and score)	12 cm, 2 yellow digits, 1 red digit and 2 white digits per player	12 cm, 2 yellow digits, 1 red digit and 2 white digits per player	12 cm, 2 yellow digits, 1 red digit and 2 white digits per player	
Team name	Stickers	Stickers	Stickers	

# FIBA LEVEL 2 TYPE SCOREBOARD SBS - 2000TX



# FIBA LEVEL 2 TYPE SCOREBOARD SBS - 2000TX



**SBS 2000TS**  
(12 players)



**SBS 2000TR**  
(16 players and suspension time)



**SBS 2000T3**  
(3x3)



**SBS 2000TN**  
(NBA type with players info)



**SBS 2000TA**  
(Basic type)



**SBS 2000TH**  
(Basic type with suspension time)



**SBS 2000TB**  
(Basic NBA type)



## TECHNICAL PARAMETERS

	SBS 2000TA	SBS 2000T3	SBS 2000TB	SBS 2000TH
Height	1250 mm	1250 mm	1250 mm	1500 mm
Width	2000 mm	2000 mm	2000 mm	2000 mm
Thickness	85 mm	85 mm	85 mm	85 mm
Weight	30 kg	31 kg	32 kg	34 kg
Average Power Consumption	240 W	210 W	265 W	310 W
Maximum Power Consumption	400 W	345 W	435 W	515 W
Operating Voltage	100-120V / 200 - 240V	100-120V / 200 - 240V	100-120V / 200 - 240V	100-120V / 200 - 240V
Operating Temperature	(-40C) - (+55C)	(-40C) - (+55C)	(-40C) - (+55C)	(-40C) - (+55C)
Protection Class	IP54	IP54	IP54	IP54
Type Of Material	Al	Al	Al	Al
Guarantee Duration	2 Years	2 Years	2 Years	2 Years
Frame Color	Mat Black	Mat Black	Mat Black	Mat Black

	SBS 2000TS	SBS 2000TR	SBS 2000TN
Height	1550 mm	2150 mm	1550 mm
Width	2200 mm	2200 mm	2200 mm
Thickness	85 mm	85 mm	85 mm
Weight	45 kg	55 kg	48 kg
Average Power Consumption	400 W	580 W	420 W
Maximum Power Consumption	665 W	965 W	700 W
Operating Voltage	100-120V / 200 - 240V	100-120V / 200 - 240V	100-120V / 200 - 240V
Operating Temperature	(-40C) - (+55C)	(-40C) - (+55C)	(-40C) - (+55C)
Protection Class	IP54	IP54	IP54
Type Of Material	Al	Al	Al
Guarantee Duration	2 Years	2 Years	2 Years
Frame Color	Mat Black	Mat Black	Mat Black

## DISPLAY CHARACTERISTICS

	SBS 2000TA	SBS 2000T3	SBS 2000TB	SBS 2000TH
Game clock	25 cm, yellow and 4 digits	25 cm, yellow and 4 digits	25 cm, yellow and 4 digits	25 cm, yellow and 4 digits
Period	20 cm, white and 1 digit	-	20 cm, white and 1 digit	20 cm, white and 1 digit
Team scores	25 cm, white and 3 digits per team	25 cm, white and 2 digits per team	25 cm, white and 3 digits per team	25 cm, white and 3 digits per team
Team fouls	23 cm, red and 1 digit per team	20 cm, red and 2 digits per team	20 cm, red and 2 digits per team	23 cm, red and 1 digit per team
Bonus indicator	-	2 yellow dots	2 yellow dots	-
Time-out indicator	3 yellow dots	-	20 cm, 1 yellow digit	3 yellow dots
Direction indicator	2 red arrows	-	2 red arrows	2 red arrows
Player's number and suspension time count (or display the last player foul)	-	-	-	16 cm, 2 yellow digits and 3 red digits per team
Team Name	16 cm, yellow and max. 4 characters per team	16 cm, yellow and max. 4 characters per team	16 cm, yellow and max. 4 characters per team	16 cm, yellow and max. 4 characters per team

	SBS 2000TS	SBS 2000TR	SBS 2000TN
Game clock	25 cm, yellow and 4 digits	25 cm, yellow and 4 digits	25 cm, yellow and 4 digits
Period	20 cm, white and 1 digit	20 cm, white and 1 digit	20 cm, white and 1 digit
Team scores	25 cm, white and 3 digits per team	25 cm, white and 3 digits per team	25 cm, white and 3 digits per team
Team fouls	23 cm, red and 1 digit per team	23 cm, red and 1 digit per team	23 cm, red and 2 digits per team
Bonus indicator	-	-	2 yellow dots
Time-out indicator	3 yellow dots	3 yellow dots	20 cm, 1 yellow digit
Direction indicator	2 red arrows	2 red arrows	2 red arrows
Player's number and suspension time count (or display the last player foul)	-	16 cm, 2 yellow digits and 3 red digits per team	-
Time-out timer	20 cm, 2 yellow digits	20 cm, 2 yellow digits	20 cm, 2 yellow digits
Player information (Player's number and made foul number)	10 cm, 2 yellow digits and 1 red digit per player	10 cm, 2 yellow digits and 1 red digit per player	10 cm, 2 yellow digits and 1 red digit per player
Team name	16 cm, yellow and max. 8 characters per team	16 cm, yellow and max. 8 characters per team	16 cm, yellow and max. 8 characters per team



S24-14



SKL-BVH-V2



S24K



SKL-BGS-V1



# MULTISPORT SCOREBOARD SBS - 2000X



# MULTISPORT SCOREBOARD SBS - 2000X



**SBS 2000S**  
(12 players)



**SBS 2000A**  
(Basic type)



**SBS 2000R**  
(16 players and  
suspension time)



**SBS 2000H**  
(Basic type with suspension time)



**SBS 20003**  
(3x3)



**SBS 2000B**  
(Basic NBA type)



**SBS 2000N**  
(NBA type with  
players info)



S24-14



SKL-BVH-V2



S24K



SKL-BGS-V1

## TECHNICAL PARAMETERS

	SBS 2000A	SBS 20003	SBS 2000B	SBS 2000H
Height	1000 mm	1000 mm	1000 mm	1250 mm
Width	2000 mm	2000 mm	2000 mm	2000 mm
Thickness	85 mm	85 mm	85 mm	85 mm
Weight	24.3 kg	24.7 kg	25 kg	27 kg
Average Power Consumption	175 W	140 W	195 W	245 W
Maximum Power Consumption	290 W	235 W	325 W	405 W
Operating Voltage	100-120V / 200 - 240V	100-120V / 200 - 240V	100-120V / 200 - 240V	100-120V / 200 - 240V
Operating Temperature	(-40C) - (+55C)	(-40C) - (+55C)	(-40C) - (+55C)	(-40C) - (+55C)
Protection Class	IP54	IP54	IP54	IP54
Type Of Material	Al	Al	Al	Al
Guarantee Duration	2 Years	2 Years	2 Years	2 Years
Frame Color	Mat Black	Mat Black	Mat Black	Mat Black
	SBS 2000S	SBS 2000R	SBS 2000N	
Height	1550 mm	2150 mm	1550 mm	
Width	2200 mm	2200 mm	2200 mm	
Thickness	85 mm	85 mm	85 mm	
Weight	40 kg	50 kg	42 kg	
Average Power Consumption	320 W	500 W	345 W	
Maximum Power Consumption	530 W	830 W	570 W	
Operating Voltage	100-120V / 200 - 240V	100-120V / 200 - 240V	100-120V / 200 - 240V	
Operating Temperature	(-40C) - (+55C)	(-40C) - (+55C)	(-40C) - (+55C)	
Protection Class	IP54	IP54	IP54	
Type Of Material	Al	Al	Al	
Guarantee Duration	2 Years	2 Years	2 Years	
Frame Color	Mat Black	Mat Black	Mat Black	

## DISPLAY CHARACTERISTICS

	SBS 2000A	SBS 20003	SBS 2000B	SBS 2000H
Game clock	25 cm, yellow and 4 digits	25 cm, yellow and 4 digits	25 cm, yellow and 4 digits	25 cm, yellow and 4 digits
Period	20 cm, white and 1 digit	-	20 cm, white and 1 digit	20 cm, white and 1 digit
Team scores	25 cm, white and 3 digits per team	25 cm, white and 2 digits per team	25 cm, white and 3 digits per team	25 cm, white and 3 digits per team
Team fouls	23 cm, red and 1 digit per team	20 cm, red and 2 digits per team	20 cm, red and 2 digits per team	23 cm, red and 1 digit per team
Bonus indicator	-	2 yellow dots	2 yellow dots	-
Time-out indicator	3 yellow dots	-	20 cm, 1 yellow digit	3 yellow dots
Direction indicator	2 red arrows	-	2 red arrows	2 red arrows
Player's number and suspension time count (or display the last player foul)	-	-	-	16 cm, 2 yellow digits and 3 red digits per team
	SBS 2000S	SBS 2000R	SBS 2000N	
Game clock	25 cm, yellow and 4 digits	25 cm, yellow and 4 digits	25 cm, yellow and 4 digits	
Period	20 cm, white and 1 digit	20 cm, white and 1 digit	20 cm, white and 1 digit	
Team scores	25 cm, white and 3 digits per team	25 cm, white and 3 digits per team	25 cm, white and 3 digits per team	
Team fouls	23 cm, red and 1 digit per team	23 cm, red and 1 digit per team	20 cm, red and 2 digits per team	
Bonus indicator	-	-	2 yellow dots	
Time-out indicator	3 yellow dots	3 yellow dots	20 cm, 1 yellow digit	
Direction indicator	2 red arrows	2 red arrows	2 red arrows	
Player's number and suspension time count (or display the last player foul)	-	16 cm, 2 yellow digits and 3 red digits per team	-	
Time-out timer	20 cm, 2 yellow digits	20 cm, 2 yellow digits	20 cm, 2 yellow digits	
Player information (Player's number and made foul number)	10 cm, 2 yellow digits and 1 red digit per player	10 cm, 2 yellow digits and 1 red digit per player	10 cm, 2 yellow digits and 1 red digit per player	
Team name	Stickers	Stickers	Stickers	

# SCHOOL TYPE HALL SCOREBOARD SBS - 1280X



# SCHOOL TYPE HALL SCOREBOARD SBS - 1200X



**SBS 1280A**  
(Basic type)



**SBS 1280B**  
(Basic NBA type)



**SBS 12803**  
(3x3)



**SBS 1200**



## TECHNICAL PARAMETERS

	SBS 1280A	SBS 12803	SBS 1280B
Height	800 mm	800 mm	800 mm
Width	1280 mm	1280 mm	1280 mm
Thickness	85 mm	85 mm	85 mm
Weight	15 kg	15.5 kg	16 kg
Average Power Consumption	80 W	90 W	100 W
Maximum Power Consumption	130 W	150 W	160 W
Operating Voltage	100-120V / 200 - 240V	100-120V / 200 - 240V	100-120V / 200 - 240V
Operating Temperature	(-40C) - (+55C)	(-40C) - (+55C)	(-40C) - (+55C)
Protection Class	IP54	IP54	IP54
Type Of Material	Al	Al	Al
Guarantee Duration	2 Years	2 Years	2 Years
Frame Color	Mat Black	Mat Black	Mat Black

## DISPLAY CHARACTERISTICS

	SBS 1280A	SBS 12803	SBS 1280B
Game clock	16 cm, yellow and 4 digits	16 cm, yellow and 4 digits	16 cm, yellow and 4 digits
Period	16 cm, white and 1 digit	-	16 cm, white and 1 digit
Team scores	16 cm, white and 2 digits per team	16 cm, white and 2 digits per team	16 cm, white and 2 digits per team
Team fouls	16 cm, red and 1 digit per team	16 cm, red and 2 digits per team	16 cm, red and 2 digits per team
Bonus indicator	-	2 yellow dots	2 yellow dots



S24



SKL-BVH-V2



S24K

## TECHNICAL PARAMETERS

	SBS 1200
Height	600 mm
Width	1200 mm
Thickness	85 mm
Weight	10 kg
Average Power Consumption	75 W
Maximum Power Consumption	110 W
Operating Voltage	100-120V / 200 - 240V
Operating Temperature	(-40C) - (+55C)
Protection Class	IP54
Type Of Material	Al
Guarantee Duration	2 Years
Frame Color	Mat Black

## DISPLAY CHARACTERISTICS

	SBS 1200
Game clock	16 cm, yellow and 4 digits
Period	16 cm, yellow and 1 digit
Team scores	16 cm, white and 2 digits per team



S24



SKL-BVH-V2



S24K

# SHOT CLOCK

## S24 / S24-14 / S24-4Y



# SHOT CLOCK CONSOLE

## S24K



### S 24 / TECHNICAL PARAMETERS

Height	350 mm
Width	500 mm
Thickness	85 mm
Weight	4.5 kg
Average Power Consumption	30 W
Maximum Power Consumption	45 W
Operating Voltage	100-120V / 200-240V
Operating Temperature	(-40°C) - (+55°C)
Protection Class	IP54
Type Of Material	Al
Guarantee Duration	2 Years
Frame Color	Mat Black



### TECHNICAL PARAMETERS

Height	83 mm
Width	115 mm
Thickness	32 mm
Weight	0.5 kg
Average Power Consumption	0.05 W
Maximum Power Consumption	0.1 W
Operating Voltage	3.3V
Operating Temperature	(-40°C) - (+55°C)
Protection Class	IP54
Guarantee Duration	2 Years
Frame Color	Mat Black



### S24-14 / TECHNICAL PARAMETERS

Height	550 mm
Width	510 mm
Thickness	85 mm
Weight	6 kg
Average Power Consumption	60 W
Maximum Power Consumption	95 W
Operating Voltage	100-120V / 200-240V
Operating Temperature	(-40°C) - (+55°C)
Protection Class	IP54
Type Of Material	Al
Guarantee Duration	2 Years
Frame Color	Mat Black



# GAME TIME CONSOLE

## SKL-BGS-V1



### S24-4Y / TECHNICAL PARAMETERS

Height	550 mm
Width	580 mm
Thickness	500 mm
Weight	20 kg
Average Power Consumption	225 W
Maximum Power Consumption	375 W
Operating Voltage	100-120V / 200-240V
Operating Temperature	(-40°C) - (+55°C)
Protection Class	IP54
Type Of Material	Al
Guarantee Duration	2 Years
Frame Color	Mat Black



### TECHNICAL PARAMETERS

Height	83 mm
Width	115 mm
Thickness	32 mm
Weight	0.5 kg
Average Power Consumption	0.05 W
Maximum Power Consumption	0.1 W
Operating Voltage	3.3V
Operating Temperature	(-40°C) - (+55°C)
Protection Class	IP54
Guarantee Duration	2 Years
Frame Color	Mat Black



## MAIN CONSOLE SKL-BVH-V2



### TECHNICAL PARAMETERS

Height	185 mm
Width	340 mm
Thickness	70 mm
Weight	2 kg
Average Power Consumption	6 W
Maximum Power Consumption	50 W
Operating Voltage	10.8V / 16.8V
Operating Temperature	(-40°C) – (+55°C)
Protection Class	IP54
Type Of Material	Al
Guarantee Duration	2 Years
Frame Color	Gray



## FOUR SIDED DIGITAL TEAM FOUL MARKERS SKL-TFM-V1



### TECHNICAL PARAMETERS

Height	370 mm
Width	215 mm
Thickness	215 mm
Weight	4.5 kg
Average Power Consumption	25 W
Maximum Power Consumption	30 W
Operating Voltage	100-120V / 200-240V
Operating Temperature	(-40°C) – (+55°C)
Protection Class	IP54
Type Of Material	Al
Guarantee Duration	2 Years
Frame Color	Gray



## COACH BUTTON SKL-CB-V1



### TECHNICAL PARAMETERS

Height	1000 mm
Width	260 mm
Weight	6.8 kg
Average Power Consumption	0.05 W
Maximum Power Consumption	0.1 W
Operating Voltage	0.3V
Operating Temperature	(-40°C) – (+55°C)
Protection Class	IP54
Guarantee Duration	2 Years



## DIRECTION INDICATOR SYG



### TECHNICAL PARAMETERS

Height	160 mm
Width	340 mm
Thickness	30 mm
Weight	1 kg
Maximum Power Consumption	3.5 W
Operating Voltage	12V
Operating Temperature	(-40°C) – (+55°C)
Protection Class	IP54
Type Of Material	Al
Guarantee Duration	2 Years
Frame Color	Mat Black



Skorled®

the best  
score is  
quality

# SWIMMING SWIMMING

WATER POLO

XXXX  
XXXX

# 002





## 02

SWIMMING  
SYSTEM

## GENERAL FEATURES

- It has three language supports: Turkish, English and French. There is support for a total of 157 characters. In addition to the characters of the three languages, it also includes German, Azerbaijani, Turkmen and Uzbek characters.
- It can work wired or wireless.
- The controller can be used wirelessly for up to 4 hours with a 1 hour charge.
- Systems are so easy for the user.
- It works fully compatible with Splash Meet Manager program.
- Race data and results can be printed out with an external thermal printer.
- All equipment can be tested.
- It has the feature of rescuing races that cannot be started on time.
- There are 50 race, 128 event order and 100 flash event order memories.
- Lane errors can be followed instantly both on the lane box and on the controller.
- Time is measured with an accuracy of 0.00 and a precision of 0.00.

SWIMMING  
SYSTEM  
SSS-LVE-SX

  
the best score is quality

## EQUIPMENT

- 1 piece race starter (STR – 100)
- As many as number of lanes touchpad (ST – 2490 – F)  
(It might be increased or decreased according to number of far or near lanes.)
- As many as number of lanes lane box (SKL – LB – V1)  
(It might be increased or decreased according to number of far or near lanes.)
- 1 piece thermal printer (SKL – ETP – 5V)
- 1 piece swimming controller (SKL – SWC – V2)
- 1 piece graphic scoreboard (SKL – LVE – X)  
(The screen size can be changed optionally.)



Touchpad (ST-2490-F)



Thermal Printer (SKL-ETP-5V)



Race Starter (STR-100)



SKL-SWC-V2 (Swimming Controller &amp; Timer)



Lane Box (SKL-LB-V1)

Ln	Ptc	NAME	TEAM	TIME
4	1	IZZET CAN ARARA	TUR	1:36.58
8	2	SARIK OMER TAR	TUR	1:41.89
6	3	CAN YILMAZ	TUR	1:47.30
5	4	KAAN TURKER AY	TUR	1:52.04
2	5	MUSTAFA KUBILAY	TUR	1:57.93
1	6	TURGUT AGABEYOĞ	TUR	2:03.86
3	7	BORA ÖZARSLAN	TUR	2:08.80
7	8	BORA KURTMAN	TUR	2:14.63

Graphics Scoreboard (SKL- LVE- X)

# SWIMMING SYSTEM

## SSS-N20-D




### EQUIPMENT

- 1 piece race starter (STR – 100)
- As many as number of lanes touchpad (ST – 2490 – F) (It might be increased or decreased according to number of far or near lanes.)
- As many as number of lanes lane box (SKL – LB – V1) (It might be increased or decreased according to number of far or near lanes.)
- 1 piece thermal printer (SKL – ETP – 5V)
- 1 piece swimming controller (SKL – SWC – V2)
- 1 piece lap-length-time module (SKL – SLT – 2L)
- 1 piece event-heat-record module (SKL – SEHR – 2L)
- 1 piece lane scoreboard (SKL – SPL – X) (The number of lines can be increased or decreased depending to the number of lanes.)
- 1 piece team score module (SKL-STP-2L)
- 2 pieces lap module (SKL – SLAP – S)

### OPTIONAL EQUIPMENT

- Scoreboard can be produced with a display size of 25 cm, 30 cm or with a special dimensions according to the display.

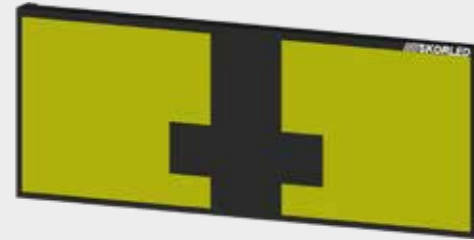

Touchpad (ST-2490-F)



Race Starter (STR-100)



Lane Box (SKL-LB-V1)



Thermal Printer (SKL-ETP-5V)

# SWIMMING SYSTEM

## SSS-N20-C



### EQUIPMENT

- 1 piece race starter (STR – 100)
- As many as number of lanes touchpad (ST – 2490 – F) (It might be increased or decreased according to number of far or near lanes.)
- As many as number of lanes lane box (SKL – LB – V1) (It might be increased or decreased according to number of far or near lanes.)
- 1 piece thermal printer (SKL – ETP – 5V)
- 1 piece swimming controller (SKL – SWC – V2)
- 1 piece lap-length-time module (SKL – SLT – 2L)
- 1 piece event-heat-record module (SKL – SEHR – 2L)
- 1 piece lane scoreboard (SKL – SPL – X) (The number of lines can be increased or decreased depending to the number of lanes.)

### OPTIONAL EQUIPMENT

- Record, lap-length and team score, and the scoreboard modules can be added to the scoreboard.
- Scoreboard can be produced with a display size of 25 cm, 30 cm or with a special dimensions according to the display.



Touchpad (ST-2490-F)



Race Starter (STR-100)



Lane Box (SKL-LB-V1)



Thermal Printer (SKL-ETP-5V)



SKL-SWC-V2 (Swimming Controller & Timer)



Lane Scoreboard (SKL-SPL-X)



Event-Heat-Record Module (SKL-SEHR-2L)  
Lap-Length-Time Module (SKL-SLT-2L)



Lap Module (SKL-SLAP-S)



Team Score Module (SKL-STP-2L)



SKL-SWC-V2 (Swimming Controller & Timer)



Lap-Length-Time Module (SKL-SLT-2L)  
Event-Heat-Record Module (SKL-SEHR-2L)  
Lane Scoreboard (SKL-SPL-X)

# SWIMMING SYSTEM

## SSS-N20-B



### EQUIPMENT

- 1 piece race starter (STR – 100)
- As many as number of lanes touchpad (ST – 2490 – F) (It might be increased or decreased according to number of far or near lanes.)
- As many as number of lanes lane box (SKL – LB – V1) (It might be increased or decreased according to number of far or near lanes.)
- 1 piece thermal printer (SKL – ETP – 5V)
- 1 piece swimming controller (SKL – SWC – V2)
- 1 piece time module (SKL – STM – 1L)
- 1 piece event-heat module (SKL – SEH – 1L)
- 1 piece lane scoreboard (SKL – SPL – X)  
(The number of lines can be increased or decreased depending to the number of lanes.)

### OPTIONAL EQUIPMENT

- Record, lap-length and team score, and the scoreboard modules can be added to the scoreboard.
- Scoreboard can be produced with a display size of 25 cm, 30 cm or with a special dimensions according to the display.



Touchpad (ST-2490-F)



Thermal Printer (SKL-ETP-5V)



Race Starter (STR-100)



SKL-SWC-V2 (Swimming Controller & Timer)



Lane Box (SKL-LB-V1)



Time Module (SKL-STM-1L)  
Event-Heat Module (SKL-SEH-1L)  
Lane Scoreboard (SKL-SPL-X)

# SWIMMING SYSTEM

## SSS-N20-A



### EQUIPMENT

- 1 piece race starter (STR – 100)
- As many as number of lanes touchpad (ST – 2490 – F) (It might be increased or decreased according to number of far or near lanes.)
- As many as number of lanes lane box (SKL – LB – V1) (It might be increased or decreased according to number of far or near lanes.)
- 1 piece thermal printer (SKL – ETP – 5V)
- 1 piece swimming controller (SKL – SWC – V2)
- 1 piece lane scoreboard (SKL – SPL – X)  
(The number of lines can be increased or decreased depending to the number of lanes)

### OPTIONAL EQUIPMENT

- Record, lap-length and team score, and the scoreboard modules can be added to the scoreboard.
- Scoreboard can be produced with a display size of 25 cm, 30 cm or with a special dimensions according to the display.



Touchpad (ST-2490-F)



Thermal Printer (SKL-ETP-5V)



Race Starter (STR-100)



SKL-SWC-V2 (Swimming Controller & Timer)



Lane Box (SKL-LB-V1)



Lane Scoreboard (SKL-SPL-X)



## LANE BOX

SKL-LB-V1 / TECHNICAL PARAMETERS

Height	80 mm
Width	160 mm
Thickness	41 mm
Weight	520 g
Cable Length	3 m
Average Power Consumption	380 mW
Operating Voltage	12 V
Operating Temperature	(-40°C) – (+55°C)
Protection Class	IP65
Type Of Material	ABS
Guarantee Duration	2 Years
Frame Color	Mat Black



## RACE STARTER

STR-100 / TECHNICAL PARAMETERS

Height	230 mm
Width	207 mm
Thickness	300 mm
Weight	5.4 kg
Operating Voltage	14.8V
Operating Temperature	(-40°C) – (+55°C)
Protection Class	IP54
Type Of Material	Al
Guarantee Duration	2 Years
Frame Color	Mat Black



## WATER POLO CONTROLLER

SKL-WP-V2 / TECHNICAL PARAMETERS

Height	185 mm
Width	300 mm
Thickness	70 mm
Weight	2 kg
Average Power Consumption	5.5 W
Maximum Power Consumption	40 W
Operating Voltage	10.8-16.8V
Operating Temperature	(-40°C) – (+55°C)
Protection Class	IP54
Type Of Material	Al
Guarantee Duration	2 Years
Frame Color	Mat Black



## RELAY TAKE-OFF PLATFORM

SKL-RTS-V1 / TECHNICAL PARAMETERS

Maximum Height	660 mm
Maximum Width	640 mm
Pressing Area	0,37 m²
Pressing Area Width	505 mm
Weight	25 kg
Operating Temperature	(-40°C) – (+55°C)
Protection Class	IP54
Type Of Material	CTP
Guarantee Duration	2 Years
Frame Color	White-Blue



## SWIMMING CONTROLLER (TIMER)

SKL-SWC-V2 / TECHNICAL PARAMETERS

Height	102 mm
Width	338 mm
Thickness	287 mm
Weight	2.6 kg
Maksimum Power Consumption	50 W
Average Power Consumption	22 W
Operating Voltage	10.8V – 16.8V
Operating Temperature	(-40°C) – (+55°C)
Protection Class	IP54
Type Of Material	Al
Guarantee Duration	2 Years



## THERMAL PRINTER

SKL-ETP-5V / TECHNICAL PARAMETERS

Height	57 mm
Width	133 mm
Thickness	126 mm
Maksimum Power Consumption	7.5 W
Operating Voltage	5V – 9V
Operating Temperature	(+5°C) – (+50°C)
Operating Humidity	%10 – %90
Printing Speed	50 – 80 mm/s
Maximum Paper Roll Diameter	39 mm
Protection Class	IP50
Guarantee Duration	2 Years
Frame Color	Mat Black



## TOUCHPAD

ST-2490-F / TECHNICAL PARAMETERS

Dimensions	240x90x1 cm
Weight	30 kg
Operating Type	Switch method
Product Color	Yellow-Black
Connection Socket	Banana jack
Product Maintenance	Maintenance is required
Control Unit	With controller connection
Guarantee Duration	2 Years
Frame Type	UV Resistant PVC
Protection Class	IP67
Platform	Device can be mountable where you want
Cable Length	2.75 meters



## GRAPHIC SCOREBOARD

SKL-LVE-X / TECHNICAL PARAMETERS

Operating Voltage	100 – 120V / 200V – 240V
Operating Temperature	(-40°C) – (+55°C)
Protection Class	IP54
Type Of Material	Al
Guarantee Duration	2 Years
Frame Color	Mat Black

2. Erkekler, 200m Freestyle L: 4/4  
E: 2 H: 1 12:34.6

Ln	Plc	NAME	TEAM	TIME
4	1	IZZET CAN ARARA	TUR	1:36.58
8	2	SARIK OMER TAR	TUR	1:41.89
6	3	CAN YILMAZ	TUR	1:47.30
5	4	KAAN TURKER AY	TUR	1:52.04
2	5	MUSTAFA KUBILAY	TUR	1:57.93
1	6	TURGUT AGABEYOĞ	TUR	2:03.86
3	7	BORA OZARSLAN	TUR	2:08.80
7	8	BORA KURTMAN	TUR	2:14.63

## LANE SCOREBOARD

SKL-SPL-X / TECHNICAL PARAMETERS

Height	2900 mm
Width	1900 mm
Thickness	85 mm
Weight	75 kg
Maximum Power Consumption	900 W
Average Power Consumption	475 W
Operating Voltage	100 – 120V / 200V – 240V
Operating Temperature	(-40°C) – (+55°C)
Protection Class	IP54
Type Of Material	Al
Guarantee Duration	2 Years
Frame Color	Mat Black

PLACE	LANE	TIME
1	3	:40.57
2	8	:40.93
3	7	:41.39
4	0	:41.82
5	4	:42.16

## LANE SCOREBOARD

SKL-SLN-1L / TECHNICAL PARAMETERS

Height	290 mm
Width	1900 mm
Thickness	85 mm
Weight	9.2 kg
Maximum Power Consumption	90 W
Average Power Consumption	47.5 W

5	9	23:46.87
---	---	----------

## EVENT-HEAT-RECORD SCOREBOARD MODULES

SKL-SREC-1L / SKL-SEH-1L  
TECHNICAL PARAMETERS

Height	290 mm
Width	1900 mm
Thickness	85 mm
Weight	9 kg
Maximum Power Consumption	67.5 W
Average Power Consumption	35.6 W

RECORD	12:08.73
284	EVENT HEAT 90

## LANE SCOREBOARD

SKL-SLN-2L / TECHNICAL PARAMETERS

Height	580 mm
Width	1900 mm
Thickness	85 mm
Weight	14.4 kg
Maximum Power Consumption	180 W
Average Power Consumption	95 W

3	9	1:07.39
4	2	44.02

## EVENT-HEAT-RECORD SCOREBOARD MODULES

SKL-SEHR-2L / TECHNICAL PARAMETERS

Height	600 mm
Width	1900 mm
Thickness	85 mm
Weight	13 kg
Maximum Power Consumption	150 W
Average Power Consumption	92 W
Operating Voltage	100 – 120V / 200V – 240V
Operating Temperature	(-40°C) – (+55°C)
Protection Class	IP54
Type Of Material	Al
Guarantee Duration	2 Years
Frame Color	Mat Black

1025	EVENT HEAT 13
RECORD	:51.68

## LAP-LENGTH-TIME SCOREBOARD MODULES

SKL-SLL-1L / TECHNICAL PARAMETERS

Height	290 mm
Width	1900 mm
Thickness	85 mm
Weight	8.8 kg
Maximum Power Consumption	45 W
Average Power Consumption	23.8 W



## LAP-LENGTH-TIME SCOREBOARD MODULES

SKL - SLT - 2L / TECHNICAL PARAMETERS

Height	580 mm
Width	1900 mm
Thickness	85 mm
Weight	14 kg
Maximum Power Consumption	112.5 W
Average Power Consumption	59.4 W
Operating Voltage	100 - 120V / 200V - 240V
Operating Temperature	(-40°C) - (+55°C)
Protection Class	IP54
Type Of Material	Al
Guarantee Duration	2 Years
Frame Color	Mat Black



## LAP-LENGTH-TIME SCOREBOARD MODULES

SKL-STM-1L / TECHNICAL PARAMETERS

Height	290 mm
Width	1900 mm
Thickness	85 mm
Weight	9 kg
Maximum Power Consumption	67.5 W
Average Power Consumption	35.6 W



## TEAM SCORE SCOREBOARD MODULES

SKL-STP-HG / SKL-STP-GG  
TECHNICAL PARAMETERS

Height	290 mm
Width	1900 mm
Thickness	85 mm
Weight	9.2 kg
Maximum Power Consumption	90 W
Average Power Consumption	47.5 W



## LAP-LENGTH-TIME SCOREBOARD MODULES

SKL-SLAP-S / TECHNICAL PARAMETERS

Height	350 mm
Width	500 mm
Thickness	85 mm
Weight	4.5 kg
Maximum Power Consumption	45 W
Average Power Consumption	30 W



## TEAM SCORE SCOREBOARD MODULES

SKL-STP-2L / TECHNICAL PARAMETERS


Height	580 mm
Width	1900 mm
Thickness	85 mm
Weight	14.4 kg
Maximum Power Consumption	180 W
Average Power Consumption	95 W
Operating Voltage	100 - 120V / 200V - 240V
Operating Temperature	(-40°C) - (+55°C)
Protection Class	IP54
Type Of Material	Al
Guarantee Duration	2 Years
Frame Color	Mat Black



Skorled®

the best  
score is  
quality

FOOTBALL  
FOOTBALL  
RUGBY



XXXX  
XXXX



003



[www.skorled.com](http://www.skorled.com)

# FOOTBALL SYSTEM

## GENERAL FEATURES

- It has three language supports: Turkish, English and French. There is support for a total of 157 characters. In addition to the characters of the three languages, it also includes German, Azerbaijani, Turkmen and Uzbek characters.
- It can work wired or wireless.
- The controller can be used wirelessly for up to 15 hours with a 1.5 hour charge.
- Systems are so easy for the user.
- Team information and player information of the team can be recorded.
- Statistics of the game are recorded.
- It supports referee, player and card animations.
- It has the feature of showing messages on the scoreboard.
- The operation of the scoreboard can be tested.



## FOOTBALL – RUGBY SCOREBOARD

SKL-LVE-FX

**Skorled**  
the best score is quality

### TECHNICAL PARAMETERS

Operating Voltage	100 – 120V / 200V – 240V
Operating Temperature	(-40°C) – (+55°C)
Protection Class	IP65
Type Of Material	Al
Guarantee Duration	2 Years
Frame Color	Mat Black



## FOOTBALL – RUGBY SCOREBOARD

SFS-500-3L

**Skorled**  
the best score is quality

### TECHNICAL PARAMETERS

Height	1920 mm
Width	5120 mm
Thickness	85 mm
Weight	260.8 kg
Maximum Power Consumption	1440 W
Average Power Consumption	1040 W
Operating Voltage	100 – 120V / 200V – 240V
Operating Temperature	(-40°C) – (+55°C)
Protection Class	IP65
Type Of Material	Al
Guarantee Duration	2 Years
Frame Color	Mat Black

### DISPLAY CHARACTERISTICS

Game clock	64 cm, red and 4 digits
Team scores	56 cm, red and 2 digits per team
Team names	56 cm, red and max. 12 characters per team



SKL-FPC-V3

# FOOTBALL – RUGBY SCOREBOARD

SFS-400-3L



## TECHNICAL PARAMETERS

Height	1440 mm
Width	3840 mm
Thickness	85 mm
Weight	146.7 kg
Maximum Power Consumption	810 W
Average Power Consumption	585 W
Operating Voltage	100 – 120V / 200V – 240V
Operating Temperature	(-40°C) – (+55°C)
Protection Class	IP65
Type Of Material	Al
Guarantee Duration	2 Years
Frame Color	Mat Black



SKL-FPC-V3

## DISPLAY CHARACTERISTICS

Game clock	48 cm, red and 4 digits
Team scores	42 cm, red and 2 digits per team
Team names	42 cm, red and max. 12 characters per team

# FOOTBALL – RUGBY SCOREBOARD

SFS-300-M



## TECHNICAL PARAMETERS

Height	960 mm
Width	2560 mm
Thickness	85 mm
Weight	66 kg
Maximum Power Consumption	360 W
Average Power Consumption	260 W
Operating Voltage	100 – 120V / 200V – 240V
Operating Temperature	(-40°C) – (+55°C)
Protection Class	IP65
Type Of Material	Al
Guarantee Duration	2 Years
Frame Color	Mat Black



SKL-AFC-V1 (Astroturf-Football Controller)

## DISPLAY CHARACTERISTICS

Game clock	48 cm, red and 4 digits
Team scores	42 cm, red and 2 digits per team

# FOOTBALL – RUGBY SCOREBOARD

SFS-300-3L



## TECHNICAL PARAMETERS

Height	960 mm
Width	2560 mm
Thickness	85 mm
Weight	66 kg
Maximum Power Consumption	360 W
Average Power Consumption	260 W
Operating Voltage	100 – 120V / 200V – 240V
Operating Temperature	(-40°C) – (+55°C)
Protection Class	IP65
Type Of Material	Al
Guarantee Duration	2 Years
Frame Color	Mat Black



SKL-FPC-V3

## DISPLAY CHARACTERISTICS

Game clock	32 cm, red and 4 digits
Team scores	28 cm, red and 2 digits per team
Team names	28 cm, red and max. 12 characters per team

# FOOTBALL – RUGBY SCOREBOARD

SFS-128-3L



## TECHNICAL PARAMETERS

Height	480 mm
Width	1280 mm
Thickness	85 mm
Weight	16.5 kg
Maximum Power Consumption	90 W
Average Power Consumption	65 W
Operating Voltage	100 – 120V / 200 – 240V
Operating Temperature	(-40°C) – (+55°C)
Protection Class	IP65
Type Of Material	Al
Guarantee Duration	2 Years
Frame Color	Mat Black



SKL-FPC-V3

## DISPLAY CHARACTERISTICS

Game clock	16 cm, red and 4 digits
Team scores	12 cm, red and 2 digits per team
Team names	12 cm, red and max. 12 characters per team

# FOOTBALL – RUGBY SCOREBOARD

SFS-128-M



## TECHNICAL PARAMETERS

Height	480 mm
Width	1280 mm
Thickness	85 mm
Weight	16.5 kg
Maximum Power Consumption	90 W
Average Power Consumption	65 W
Operating Voltage	100 – 120V / 200 – 240V
Operating Temperature	(-40°C) – (+55°C)
Protection Class	IP65
Type Of Material	Al
Guarantee Duration	2 Years
Frame Color	Mat Black



SKL-AFC-V1 (Astroturf-Football Controller)

## DISPLAY CHARACTERISTICS

Game clock	16 cm, red and 4 digits
Team scores	28 cm, red and 2 digits per team

# ASTROTURF – FOOTBALL SCOREBOARD

SFS-200-30



## TECHNICAL PARAMETERS

Height	1000 mm
Width	2000 mm
Thickness	100 mm
Weight	24 kg
Average Power Consumption	150 W
Operating Voltage	220V
Operating Temperature	(-15°C) – (+55°C)
Protection Class	IP65
Type Of Material	Al
Guarantee Duration	2 Years
Frame Color	Mat Black



SKL-AFC-V1 (Astroturf-Football Controller)

## DISPLAY CHARACTERISTICS

Game clock	30 cm, red and 4 digits
Team scores	30 cm, red and 2 digits per team

# FOOTBALL FIELD SCOREBOARD

SFS-250-40



## TECHNICAL PARAMETERS

Height	1200 mm
Width	2500 mm
Thickness	100 mm
Weight	41 kg
Average Power Consumption	230 W
Operating Voltage	220V
Operating Temperature	(-15°C) – (+55°C)
Protection Class	IP65
Type Of Material	Al
Guarantee Duration	2 Years
Frame Color	Mat Black



SKL-AFC-V1 (Astroturf-Football Controller)



SKL-AFC-V1 (Software)

## DISPLAY CHARACTERISTICS

Game clock	40 cm, red and 4 digits
Team scores	40 cm, red and 2 digits per team

# ASTROTURF – FOOTBALL SCOREBOARD

SHS-120



## TECHNICAL PARAMETERS

Height	600 mm
Width	1200 mm
Thickness	85 mm
Weight	14 kg
Maximum Power Consumption	108 W
Average Power Consumption	72 W
Operating Voltage	100 – 120V / 200 – 240V
Operating Temperature	(-40°C) – (+55°C)
Protection Class	IP65
Type Of Material	Al
Guarantee Duration	2 Years
Frame Color	Mat Black



SKL-ASC-V1



SKL-AFC-V1 (Astroturf-Football Controller)



SKL-AFC-V1 (Software)

## DISPLAY CHARACTERISTICS

Game clock	16 cm, red and 4 digits
Team scores	16 cm, red and 2 digits per team


# SUBSTITUTION BOARD

SOD-75



## TECHNICAL PARAMETERS

Height	415 mm
Width	730 mm
Thickness	19 mm
Weight	2.5 kg
Average Power Consumption	45 W
Operating Voltage	14.8V
Operating Temperature	(-15°C) – (+55°C)
Protection Class	IP65
Type Of Material	ABS
Guarantee Duration	2 Years
Frame Color	Mat Black

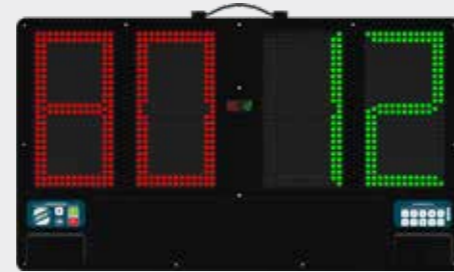

# ASTROTURF SCOREBOARD CONTROLLER

SKL - AFC - V1

Height	39 mm
Width	145 mm
Thickness	85 mm
Weight	0.35 kg
Maximum Power Consumption	0.5 W
Average Power Consumption	0.3 W
Operating Voltage	8.4V
Operating Temperature	(-40°C) – (+55°C)
Discharge Duration	4 Day
Protection Class	IP54
Guarantee Duration	2 Years
Frame Color	Mat Black



# FOOTBALL SCOREBOARD CONTROLLER

SKL - FPC - V3



Height	185 mm
Width	300 mm
Thickness	70 mm
Weight	2 kg
Average Power Consumption	5.5 W
Operating Voltage	10.8 - 16.8 V
Operating Temperature	(-40°C) – (+55°C)
Protection Class	IP54
Type Of Material	Al
Guarantee Duration	2 Years
Frame Color	Gray




# ASTROTURF SCOREBOARD CONTROLLER

SKL - ASC - V1



Height	62 mm
Width	100 mm
Thickness	68 mm
Weight	0.25 kg
Operating Temperature	(-40°C) – (+55°C)
Protection Class	IP65
Guarantee Duration	2 Years
Frame Color	Mat Black

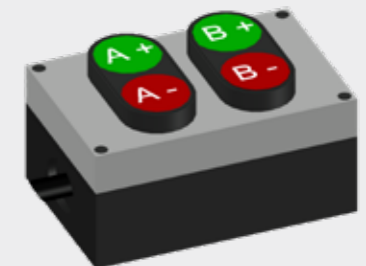




Skorled®

the best  
score is  
quality

# ATHLETICS ATHLETICS

xxx  
xxx

# 004





# ATHLETICS NUMERIC SYSTEM SAS-N20-X



www.skorled.com



## EQUIPMENT

- 1 piece data center (SKL – ADC – V1)
- Maximum 4 pieces wireless photocell modules (SKL – WPM – V1)
- 1 piece numeric scoreboard (SKL – ANS – V1)
- Skorled Athletics Software (SKL-ATK-V1)

## OPTIONAL EQUIPMENT

- Scoreboard can be produced with a display size of 20, 25, 30, 35 or 40 cm or with a special dimensions according to display color.



Data Center (SKL-ADC-V1)



Numeric Scoreboard (SKL-ANS-V1)



Wireless Photocell Modules (SKL-WPM-V1)



Skorled Athletics Software (SKL-ATK-V1)

## GENERAL FEATURES

- All equipment can work wired or wireless.
- Athletics Data Center can be used wirelessly for up to 24 hours with a 1.5 hour charge.
- The charging status can be monitored instantly on all equipment.
- Pre-created race lists can be imported into the program.
- Race results can be exported in excel format.
- An athlete can take more than one race worth.
- As many scoreboards as desired can be set up.
- Time measurement can be made using a maximum of 4 gates.
- Time is measured with an accuracy of 0.00 and a precision of 0.00.

# 04 ATHLETICS SYSTEM

**EQUIPMENT**

- 1 piece data center (SKL - ADC - V1)
- Maximum 4 piece wireless photocell modules (SKL - WPM - V1)
- 1 piece graphic scoreboard ( SKL - AGS - V1)
- Skorled Athletics Software (SKL - ATK - V1)

**GENERAL FEATURES**

- It has the feature of starting from the desired time.
- It records and displays world record and local record.
- It can be displayed instant messages.
- It works fully compatible with TOPCON device.



Data Center (SKL-ADC-V1)




Graphics Scoreboard (SKL-AGS-V1)



Wireless Photocell Modules (SKL-WPM-V1)



Skorled Athletics Software (SKL-ATK-V1)

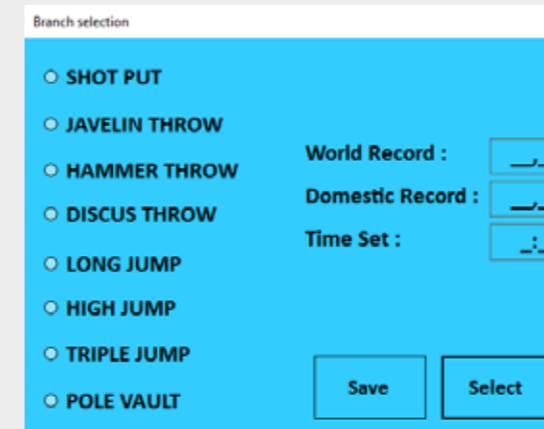

SKL-ASF-V1



SKL-ASF-V1



TOPCON

## ATHLETICS DATA CENTER

SKL - ADC - V1 / TECHNICAL PARAMETERS



Height	45 mm
Width	250 mm
Thickness	126 mm
Weight	0.4 kg
Maximum Power Consumption	2.5 W
Average Power Consumption	1.8 W
Operating Voltage	16.8 V
Operating Temperature	(-40°C) - (+55°C)
Discharge Duration	1 Day
Protection Class	IP54
Type Of Material	Al
Guarantee Duration	2 Years
Frame Color	Grey



## ATHLETICS GRAPHIC SCOREBOARD

SKL - AGS - V1 / TECHNICAL PARAMETERS



Height	480 mm
Width	1280 mm
Thickness	85 mm
Weight	16.3 kg
Maximum Power Consumption	90 W
Average Power Consumption	65 W
Operating Voltage	100 - 120V / 200V - 240V
Operating Temperature	(-40°C) - (+55°C)
Protection Class	IP65
Type Of Material	Al
Guarantee Duration	2 Years
Frame Color	Mat Black



## ATHLETICS NUMERIC SCOREBOARD

SKL - ANS - V1 / TECHNICAL PARAMETERS



Height	300 mm
Width	1000 mm
Thickness	85 mm
Weight	5 kg
Operating Voltage	100 - 120V / 200V - 240V
Operating Temperature	(-40°C) - (+55°C)
Protection Class	IP65
Type Of Material	Al
Guarantee Duration	2 Years
Frame Color	Mat Black



## WIRELESS PHOTOCELL MODULE

SKL - WPM - V1 / TECHNICAL PARAMETERS



Total Weight	3.4 kg
Maximum Power Consumption	2.5 W
Average Power Consumption	1.8 W
Operating Voltage	16.8V
Operating Temperature	(-40°C) - (+55°C)
Protection Class	IP54
Type Of Material	Al
Guarantee Duration	2 Years



Skorled®

the best  
score is  
quality

TENNIS  
TENNIS

XXX  
XXX  
XXX

005



www.skorled.com



www.skorled.com

# 05

## TENNIS SYSTEM

### GENERAL FEATURES

- It has three language supports: Turkish, English and French. In addition to the characters of the three languages, it also includes German, Azerbaijani, Turkmen and Uzbek characters.
- It can work wired or wireless.
- The controller can be used wirelessly for up to 15 hours with a 1.5 hour charge.
- The controller has a user friendly interface.
- The operation of the scoreboard can be tested.
- The game clock and the time of day are displayed on the scoreboard.

## TENNIS GRAPHIC SCOREBOARD STS-300-3L

**Skorled**  
the best score is quality

Height	960 mm
Width	2560 mm
Thickness	85 mm
Weight	66 kg
Maximum Power Consumption	360 W
Average Power Consumption	260 W
Operating Voltage	100 – 120V / 200V – 240V
Operating Temperature	(-40°C) – (+55°C)
Protection Class	IP65
Type Of Material	Al
Guarantee Duration	2 Years
Frame Color	Mat Black

Display Characteristics	
Time of Day	16 cm, white and 4 digits
Game Clock	16 cm, white and 4 digits
Game Points	28 cm, white and 2 digits
Set Scores	28 cm, white and 1 digit
Player Names	12 cm, white and max. 16 characters per player



## TENNIS CONTROL SYSTEM SKL-TNS-V1

**Skorled**  
the best score is quality

Height	185 mm
Width	300 mm
Thickness	70 mm
Weight	2 kg
Maximum Power Consumption	50 W
Average Power Consumption	5.5 W
Operating Voltage	10.8 – 16.8V
Operating Temperature	(-40°C) – (+55°C)
Protection Class	IP54
Type Of Material	Al
Guarantee Duration	2 Years
Frame Color	Gray



## CUBE DISPLAY



## ICE HOCKEY



## FIELD HOCKEY



## VIDEO BOARD



## JUDO SKORBORD



## ARCHERY



## LED PERIMETER BOARD



## CLOCK




## TENNIS





## WATER POLO





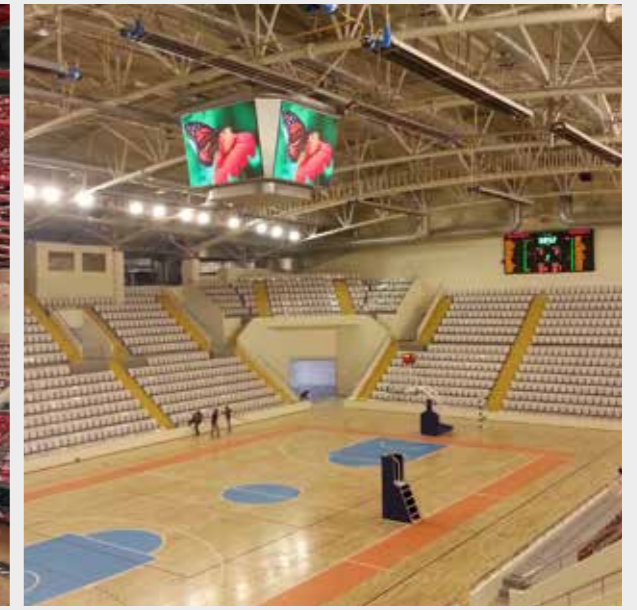



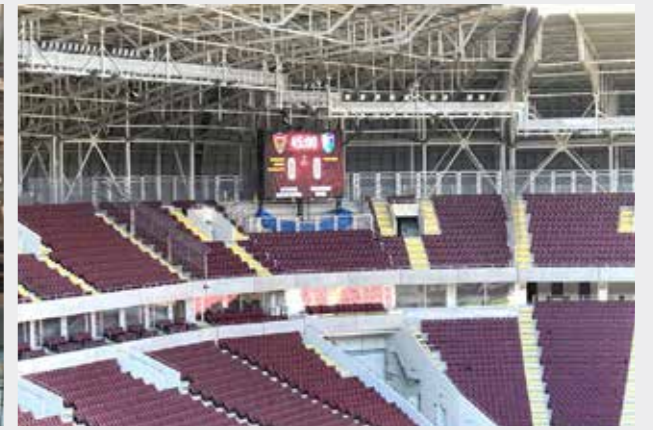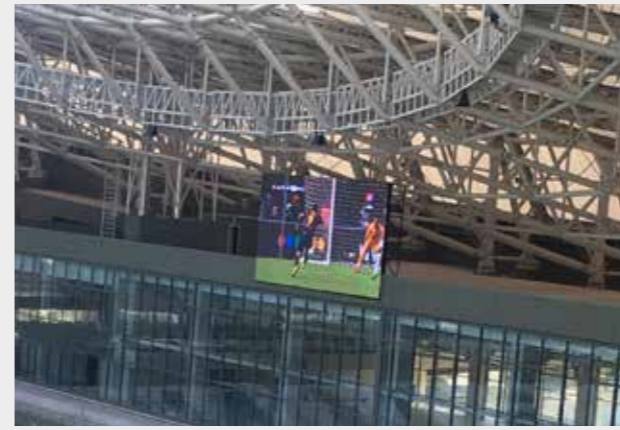



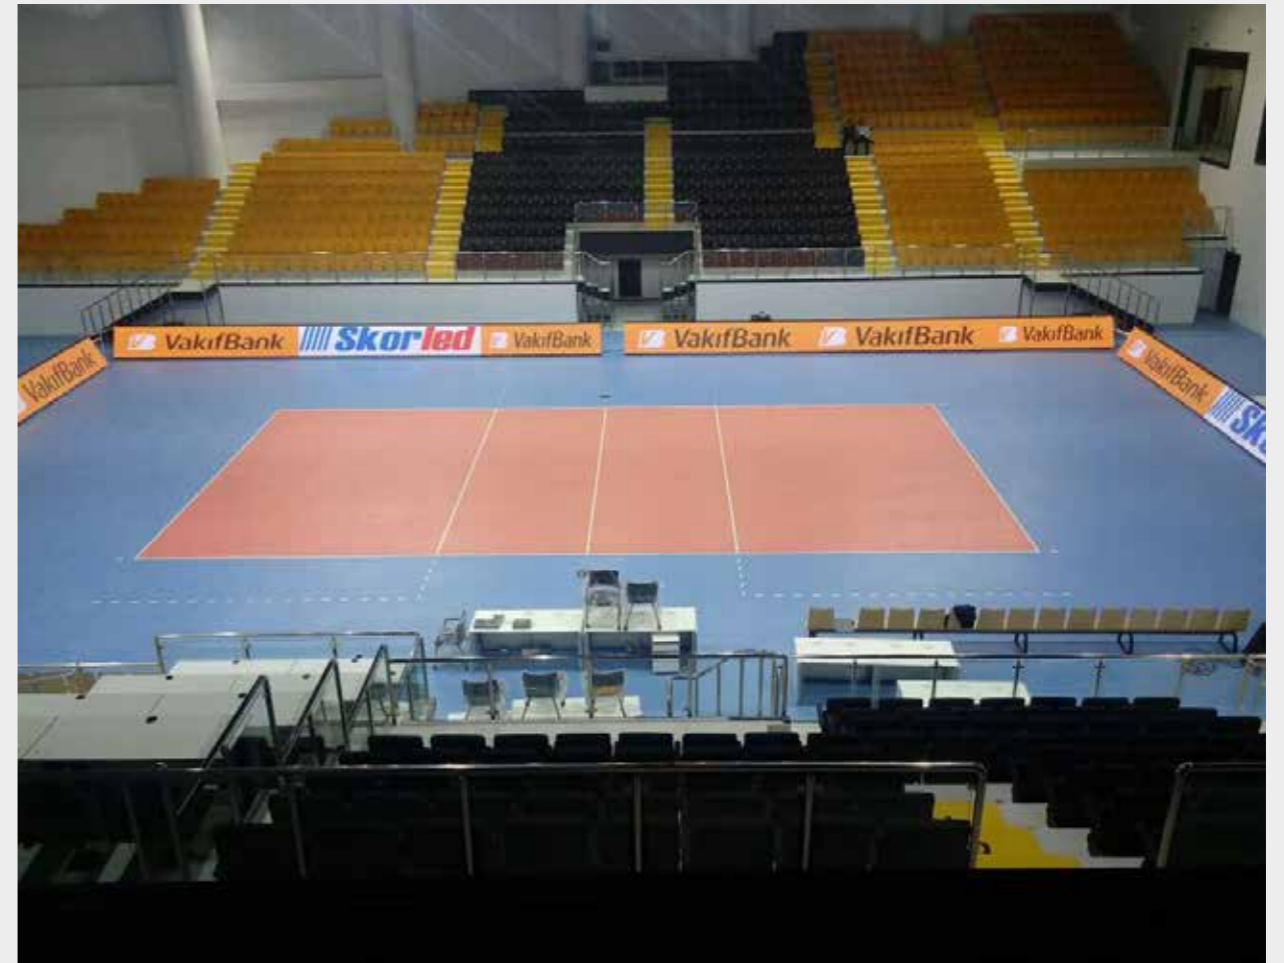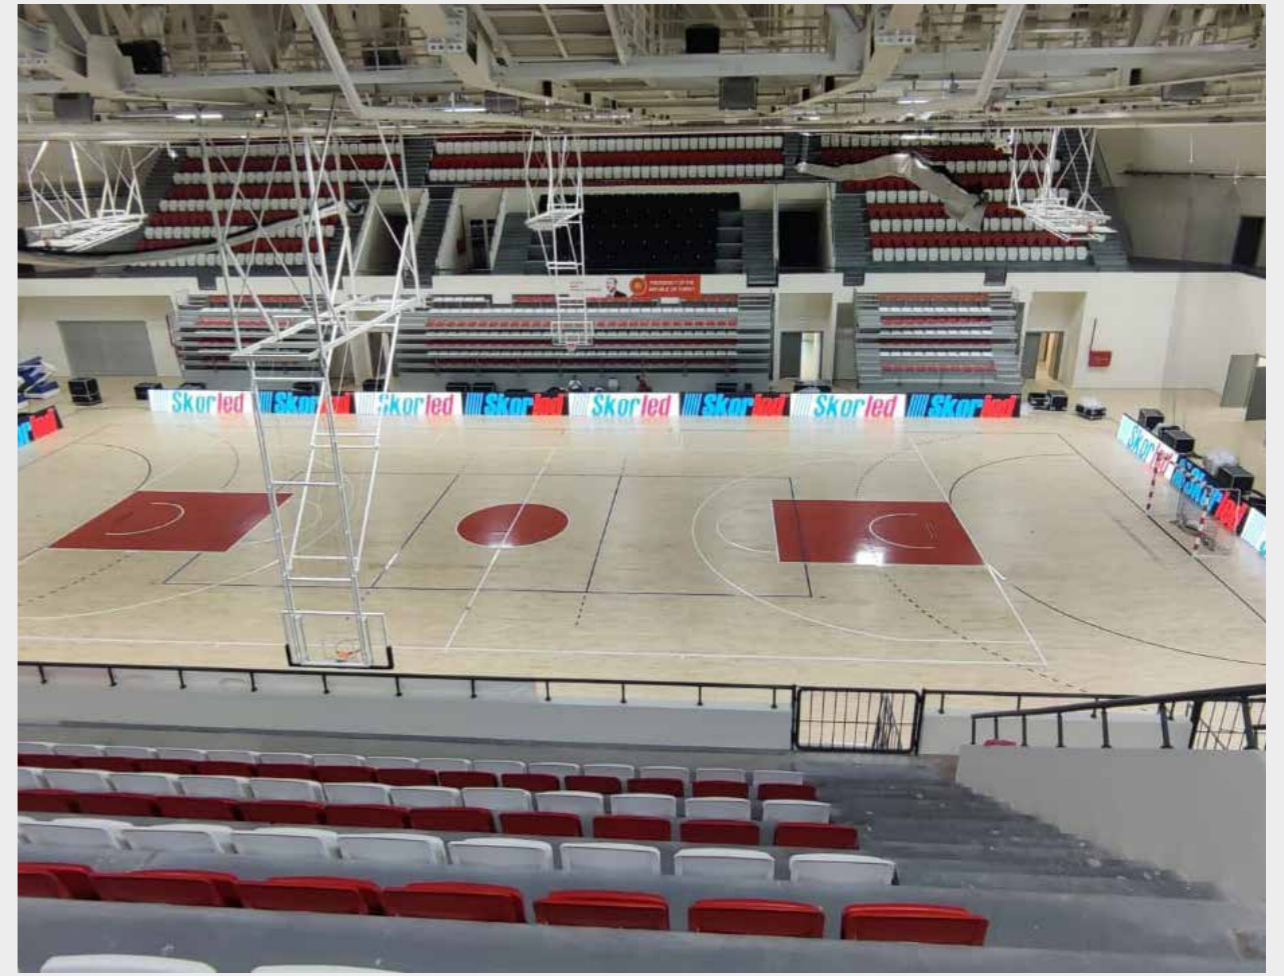

**////// Skorled®** 

İvedik Organize Sanayi Bölgesi 1549. Cadde No:9 Yenimahalle / ANKARA / TÜRKİYE  
+90 312 395 76 27 / +90 312 395 76 29 - [export@skorled.com.tr](mailto:export@skorled.com.tr)  
[www.skorled.com](http://www.skorled.com)